

JOHN DEERE 7020 TRACTOR




JOHN DEERE

TECHNICAL MANUAL JOHN DEERE 7020 TRACTOR

TM1031 (01JAN76) English

TM1031 (01JAN76)

LITHO IN THE U.S.A.
ENGLISH



7020 TRACTOR TECHNICAL MANUAL TM-1031 (Jan-76)

CONTENTS

SECTION 10 - GENERAL

- Group 5 - Specifications
- Group 10 - Predelivery, Delivery, and After-Sale Services
- Group 15 - Tune-Up
- Group 20 - Lubrication
- Group 25 - Separation

SECTION 20 - ENGINE

- Group 5 - General Information, Diagnosis, and Tests
- Group 10 - Cylinder Head, Valve Train, and Camshaft
- Group 15 - Cylinder Block, Liners, Pistons, and Rods
- Group 20 - Crankshaft, Main Bearings, and Flywheel
- Group 25 - Lubrication System
- Group 30 - Cooling System

SECTION 30 - FUEL SYSTEM

- Group 5 - Diagnosing Malfunctions
- Group 10 - Air Intake System
- Group 15 - Fuel Injection System
- Group 20 - Control Linkage

SECTION 40 - ELECTRICAL SYSTEM

- Group 5 - Information and Wiring Diagrams
- Group 10 - Motorola Charging Circuit
- Group 12 - Delcotron Charging Circuit
- Group 15 - Delco-Remy Starting Circuit
- Group 17 - John Deere Starting Circuit
- Group 20 - Lighting and Accessory Circuits

SECTION 50 - POWER TRAIN

- Group 5 - Clutch
- Group 10 - Torque Divider
- Group 15 - Syncro-Range Transmission
- Group 20 - Differentials and Drive Shafts
- Group 25 - Final Drives
- Group 30 - PTO

SECTION 60 - STEERING AND BRAKES

- Group 5 - General Information

SECTION 70 - HYDRAULIC SYSTEM


- Group 5 - General Information, Diagnosis, and Tests
- Group 10 - Main Reservoir, Filters, Valves, Oil Cooler, and Oil Reservoir
- Group 15 - Hydraulic Pumps
- Group 20 - Power Steering
- Group 25 - Power Brakes
- Group 30 - Rockshaft and Implement Hitches
- Group 35 - Selective Control Valve, Breakaway Couplers, and Remote Cylinders

SECTION 80 - MISCELLANEOUS

- Group 5 - Hinge Assembly

All information, illustrations, and specifications contained in this technical manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.

INTRODUCTION

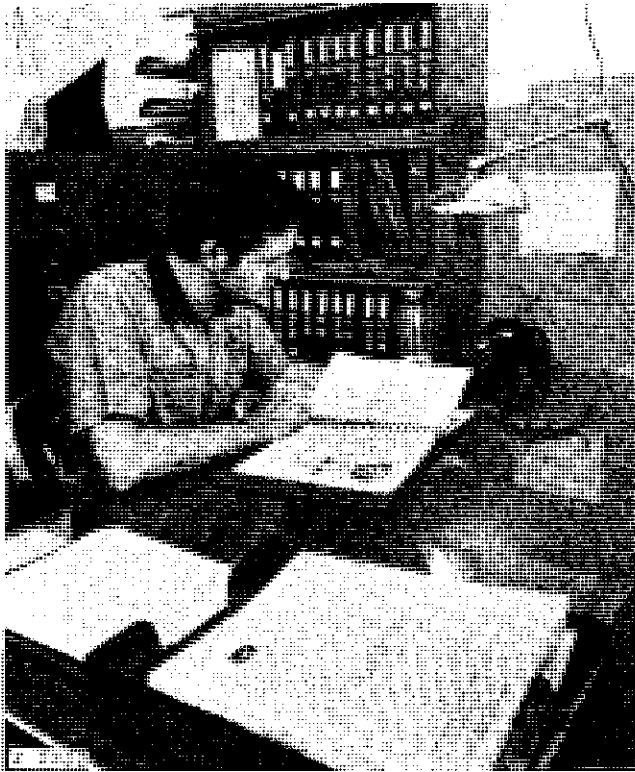

Use FOS Manuals for Reference



Use Technical Manuals for Actual Service

This technical manual is part of a twin concept of service:

- **FOS Manuals—**for reference
- **Technical Manuals—**for actual service

The two kinds of manuals work as a team to give you both the general background and technical details of shop service.

Fundamentals of Service (FOS) Manuals cover basic theory of operation, *fundamentals* of trouble shooting, *general* maintenance, and *basic* types of failures and their causes. FOS Manuals are for training new men and for reference by experienced men.

Technical Manuals are concise service guides for a specific machine. Technical Manuals are on-the-job guides containing only the vital information needed by a journeyman mechanic.



When a serviceman should refer to a FOS Manual for more information, a FOS symbol like the one at the left is used in the TM to identify the reference.

Some features of this technical manual:

- *Table of contents at front of manual*
- *Exploded views showing parts relationship*
- *Photos showing service techniques*
- *Specifications grouped for easy reference*

This technical manual was planned and written for you—a journeyman mechanic. Keep it in a permanent binder in the shop where it is handy. Refer to it whenever in doubt about correct service procedures or specifications.

Using the technical manual as a guide will reduce error and costly delay. It will also assure you the best in finished service work.



This safety alert symbol identifies important safety messages in this manual. When you see this symbol, be alert to the possibility of personal injury and carefully read the message that follows.

Section 10 GENERAL

CONTENTS OF THIS SECTION

	Page		Page
GROUP 5 - SPECIFICATIONS		GROUP 25 - SEPARATION	
General Tractor Specifications	5-1	Removing Roll-Gard Cab	25-1
GROUP 10 - PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES		Installing Roll-Gard Cab	25-2
Predelivery Services	10-1	Separating Engine from Clutch Housing	25-2
Delivery Services	10-3	Separating Engine from Tractor Front End	25-3
After-Sale Services	10-4	Removing Engine	25-5
GROUP 15 - TUNE-UP		Front Axle Assembly	25-6
Preliminary Engine Testing	15-1	Separating Transmission and Differential from Torque Divider	25-7
Engine Tune-Up	15-1	Separating Torque Divider and Tractor Rear End from Hinge	25-9
Engine Final Testing	15-2	Separating Clutch Housing from Hinge	25-9
Tractor Tune-Up	15-3	Removing Final Drive Assembly	25-10
GROUP 20 - LUBRICATION		Installing Final Drive	25-10
Lubrication Chart	20-1	Specifications	25-10
Engine Lubricating Oils	20-2	Torques For Hardware	25-10
Transmission-Hydraulic Oil	20-2	Special Tools	25-10
Greases	20-2		
Storing Lubricants	20-2		

Group 5

GENERAL TRACTOR SPECIFICATIONS

HORSEPOWER:

Maximum observed at PTO (2200
 Engine rpm)* 146.17

ENGINE:

Type 6-cylinder, in-line, valve-in-head,
 diesel, turbocharged, and intercooled

Engine Speeds:

Slow idle 800 rpm
 Working range 1500 to 2200 rpm

Compression ratio

Tractors (-2699) 16.8:1
 Tractors (2700-) 15.5:1

* In official test.

ENGINE (Continued)

Bore and stroke 4-1/4 in. x 4-3/4 in.
 Displacement 404 cu. in.
 Firing order 1-5-3-6-2-4
 Valve clearance In.-0.018 in.
 Ex.-0.028 in.

Injection pump timing TDC
 Lubrication System Force-feed pres-
 surized with full-flow oil filter

Fuel System:

Type Direct injection
 Air cleaner Dry type
 with safety element

Cooling System:

Type Pressurized with centrifugal pump
 Temperature control Heavy-duty thermostats

Capacities:

Fuel tank	78 U.S. gals. each tank
Crankcase (with filter change)	17 U.S. qts.
Transmission-hydraulic system	22 U.S. gals.
Cooling system	32 U.S. qts.
Front differential	20 U.S. qts.

Transmission:

Type	Syncro-Range, constant mesh
Clutch	Heavy-duty, 14-3/4 in. plate, foot operated
Gear selections	8 forward and 2 reverse
Shifting	Two lever shifting, synchronized shifting within stations, except reverse gears; Optional "Hi-Lo" speed selector provides two speeds in each gear for 16 forward and 4 reverse.

Ground Speeds (in miles per hour, 2200 engine rpm) *

Gear	"Lo"	"Hi"
1st	1.99	2.29
2nd	3.18	3.66
3rd	4.20	4.83
4th	5.39	6.21
5th	6.71	7.73
6th	8.80	10.13
7th	11.39	13.11
8th	18.59	21.40
1st reverse	4.09	4.70
2nd	6.54	7.53

Electrical System:

Type	12-volt, negative grounded
Batteries	Two, 6-volt, 75-plate, 172-ampere-hour, 5D type, connected in series
Alternator	12-volt, 55-amp, with integral transistorized regulator; with air conditioner, 12-volt, 72-amp with integral transistorized regulator

* Ground speeds for tractors with standard 8-speed transmission are the same as "Lo."

(Specifications and design subject to change without notice.)

Power Take-Off:

Type	Transmission-driven
Speed	1900 engine rpm in "Hi" 1000 rpm 2200 engine rpm in "Lo" or with standard 8-speed transmission 1000 rpm PTO ahead of drawbar hitch point 16 in.

Hydraulic System:

Type	Closed center, constant pressure. Includes power steering, power brakes, implement control, and transmission and differential lubrication
Standby pressure	2250 psi

Brakes Hydraulically power-actuated disk-type operating in oil

Tires* * 18.4-34, 6-ply

Wheel Tread: See operator's manual

Dimensions:

Wheel base	120 in.
Over-all length	217 in.
Over-all height (cab)	118-1/2 in. -With air conditioner 126 in.
Height to steering wheel	92-1/4 in.
Over-all width	95-1/2 in. -long-axle-114 in.
Turning radius	210 in.

Shipping Weight (With equipment for average field service, less fuel and ballast) 14,960 lbs.

* * Additional tire sizes available

Group 10

PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES

PREDELIVERY SERVICE

Because of the shipping factors involved, plus extra finishing touches that are necessary to promote customer satisfaction, proper predelivery service is of prime importance to the dealer.

A tag pointing out the factory-recommended procedure for predelivery service is attached to each new tractor before it leaves the factory.

NOTE: A Caplug is placed in the muffler outlet to prevent turbocharger rotation during transit. Remove Caplug before unloading tractor. Reinstall Caplug before transporting the tractor to the customer.

After completing the factory-recommended dealer checks and services listed on the predelivery tag, remove the tag from the tractor and file it with the shop order for the job. The tag will certify that the tractor has received the proper predelivery service when the portion of the customer's John Deere Delivery Receipt is completed.

TEMPORARY TRACTOR STORAGE

Service	Specifications	Reference
Check radiator for coolant loss and antifreeze protection	2 inches above baffle.
Reduce shipping pressure of tires	Operator's manual
Cover tractor and tires for protection and cleanliness

BEFORE DELIVERING TRACTOR

ELECTRICAL SYSTEM		
Install electrolyte and charge batteries	FOS - 20 Manual
Stamp date code on battery	FOS - 20 Manual
Connect alternator. Do not attempt to polarize	Section 40, Group 10
Install light switch knob
Clean terminals and connect battery cables	Section 40, Group 5
Check alternator belt adjustment Tractors Ser. No. (-2699)	1-inch deflection, 25 lb. force (20 lb. force on air conditioned)	Operator's manual
Tractors Ser. No. (2700-)	1-inch deflection, 25 lb. force.	
COOLING SYSTEM		
Inspect radiator for coolant loss	2 inches above baffle.
Check antifreeze protection

BEFORE DELIVERING TRACTOR—Continued

Service	Specifications	Reference
TIRES AND WHEELS		
Adjust pressure of tires	Operator's manual
Check wheel rim clamp nuts, and wheel retainer cap screws for tightness	Retainer cap screws - 300 ft-lbs Rim clamp nuts - 170 ft-lbs
Set front and rear wheel tread to a minimum of 80 in., and add at least 1000 lb. ballast to each wheel for single wheel operation	Operator's manual
Hillside operation—use double wheels only	Operator's manual
LUBRICATION		
Check crankcase oil level	To upper marks on dipstick.	Operator's manual
Check transmission-hydraulic system oil level	To top of "SAFE" range on dipstick. Type 303 Special-Purpose Oil.	Operator's manual
Check front differential oil level	To level of filler plug opening. Type 303 Special-Purpose Oil.	Operator's manual
Lubricate grease fittings	SAE multipurpose-type grease.	Operator's manual
ENGINE		
Check air cleaner; inspect air intake system connections; check hose clamps for tightness.....	Operator's manual
Fill fuel tank and start engine	Capacity - 78 U.S. gallons each tank	Operator's manual
Check operation of starter, alternator, flasher, gauges, and indicator lights	Operator's manual
Check engine timing	TDC	Section 30, Group 15
Check engine speeds	Slow idle - 800 rpm Fast idle - 2400 rpm	Section 30, Group 20

BEFORE DELIVERING TRACTOR—Continued

Service	Specifications	Reference
OPERATION		
Check transmission clutch free travel	Approximately 1-1/2-inch free travel (at least 3/4 in.)	Operator's manual
Shift transmission through all speeds	Operator's manual
Check throttle linkage for free operation	Section 30, Group 20
Adjust headlights and check operation	Operator's manual
Check power takeoff operation	Operator's manual
Check brakes and accumulator	3 in. maximum travel when brakes have been bled, and accumulator is working properly	Operator's manual
Check air conditioning, heater, and pressurizer operation	Operator's manual
Check hydraulic system operation: Steering, and remote cylinder	Operator's manual
Check seat operation	Operator's manual
GENERAL		
Tighten accessible nuts and cap screws
Clean tractor and touch up paint

DELIVERY SERVICE

A thorough discussion of the operation and service of a new tractor at the time of delivery helps to assure complete customer satisfaction. Proper delivery should be an important phase of a dealer's program. A portion of the John Deere Delivery Receipt emphasizes the importance of proper delivery service.

Many complaints have arisen simply because the owner was not shown how to operate and service his new tractor properly. Spend enough time, at the customer's convenience, to introduce the owner to his new tractor and explain to him how to operate and service it properly.

IMPORTANT: Install Caplug in muffler outlet if transporting tractor to customer. This will prevent damage to the turbocharger caused by air passing through the turbocharger and rotating it without lubrication when the engine is stopped.

The following procedure is recommended before the serviceman and owner complete the delivery acknowledgments portion of the delivery receipt.

Using the tractor operator's manual as a guide, be sure that the owner understands these points thoroughly:

1. Controls and Instruments.
2. How to start and stop the engine.
3. The importance of the break-in period.
4. How to use liquid or cast-iron ballast.
5. All functions of the hydraulic system.
6. Using the power takeoff.
7. The importance of safety.
8. The importance of lubrication and periodic services.

After explaining and demonstrating the above features, have the owner sign the delivery receipt and give him the operator's manual.

**Thank you very much
for your reading. Please
Click Here Then Get
More Information.**

NOTE:

**If there is no response to
click on the link above,
please download the PDF
document first and then
click on it.**

AFTER-SALE INSPECTION

The purchaser of a new John Deere tractor is entitled to a free inspection within the warranty period after the equipment has been "run in." The terms of this after-sale inspection are outlined on the back of the John Deere Delivery Receipt.

The purpose of this inspection is to make sure that the customer is receiving satisfactory performance from his tractor. At the same time, the inspection should reveal whether or not the tractor is being operated, lubricated, and serviced properly.

If the recommended after-sale service inspection is followed, the dealer can eliminate a needless volume of service work by preventing minor irregularities from developing into serious problems later on. This will promote strong dealer-customer relations and present the dealer an opportunity to answer questions that may have arisen during the first few days of operation. During the inspection service, the dealer has the further opportunity of promoting the possible sale of other new equipment.

The following inspection program is recommended within the first 100 hours of tractor operation.

INSPECTION PROCEDURE

Service	Specifications	Reference
COOLING SYSTEM		
Check radiator coolant level	2 inches above baffle.
Clean external surface of radiator core
Check hoses and connections for leaks
FUEL SYSTEM		
Remove water and foreign matter from filter sediment bowl	Operator's manual
Bleed fuel system	Operator's manual
Check air intake system and fuel system for leaks, correcting as required. Tighten all loose connections
Check air cleaner element, and unloading valve. Clean element if necessary	Operator's manual
ELECTRICAL SYSTEM		
Check specific gravity of battery(s)	Full charge - 1.260 at 80° F.	Operator's manual
Check level of battery electrolyte	To bottom of filler neck in each cell	Operator's manual
Check belt tension
Tractors Ser. No. (-2699)	1-inch deflection, 25 lb. force (20 lb. force on air conditioned).
Tractors Ser. No. (2700-)	1-inch deflection, 25 lb. force	Operator's manual




INSPECTION PROCEDURES—Continued

Service	Specifications	Reference
Start engine and check operation of starter, lights, and indicator lamps	Operator's manual
LUBRICATION		
Check crankcase oil level	To upper marks on dipstick	Operator's manual
Check transmission-hydraulic system oil level	In "SAFE" range on dipstick. Use John Deere Type 303 Special-Purpose Oil.	Operator's manual
Check front differential oil level	To level with filler plug opening Use John Deere Type 303 Special-Purpose Oil.	Operator's manual
ENGINE		
Check valve clearance	Intake - 0.018 inch	
	Exhaust - 0.028 inch	Operator's manual
Check engine speed under load, fuel consumption, and horsepower	Specification	Group 15 of this Section.
CHECK TRACTOR AND POWER TRAIN OPERATION		
Check transmission clutch free travel	Approximately 1-1/2 inch free travel	Operator's manual
Shift transmission through all speeds	Operator's manual
Check power steering	Smooth, easy operation	Section 70, Group 20
Check brakes and accumulator	3 inches maximum brake travel when brakes have been bled and accumulator is working properly	Operator's manual

Inspection Procedures—Continued

Service	Specification	Reference
Hydraulic System Check rockshaft and remote cylinder operation		Section 70, Group 30
Reverse signal lock out Ser. No. (-2699)		Section 70, Group 30
Negative signal stop Ser. No. (2700-)		Section 70, Group 30
Check entire tractor for leaks. Inspect drive shafts, hydraulic system pipes and hoses, and check tractor cab controls for proper operation		Operator's manual
NUTS AND CAP SCREWS		
Tighten accessible nuts and cap screws that seem to require adjustment		

TORQUE CHART (ft-lbs)

			
Bolt Diameter	Plain Head*	Three Radial Dashes*	Six Radial Dashes*
1/4	6	10	14
5/16	13	20	30
3/8	23	35	50
7/16	35	55	80
1/2	55	85	120
9/16	75	130	175
5/8	105	170	240
3/4	185	300	425
7/8	160* *	445	685
1	250* *	670	1030

* The types of bolts and cap screws are identified by head markings as follows:

Plain Head: regular machine bolts and cap screws.

3-Dash Head: tempered steel high-strength bolts and cap screws.

6-Dash Head: tempered steel extra high-strength bolts and cap screws.

* * Machine bolts and cap screws 7/8-inch and larger are sometimes formed hot rather than cold, which accounts for the lower torque.

Group 15 TUNE-UP

Before tuning up a tractor, determine whether a tune-up will restore operating efficiency. When there is doubt, the following preliminary tests will help to determine if the engine can be tuned up. If the condi-

tion is satisfactory, proceed with the tune-up. Choose from the following procedures only those necessary to restore the unit.

PRELIMINARY ENGINE TESTING

Operation	Specification	Section-Group Reference
Dynamometer Test (at 2200 engine rpm full load)	Compare with previous recorded output; compare with output after tune-up	FOS - 30 Manual, Chapter 12
Compression Test Tractors Ser. No. (-2699)	385-410 at 215-245 rpm	FOS - 30 Manual, Chapter 12
Tractors Ser. No. (2700-)	380 at 130 rpm	FOS - 30 Manual, Chapter 12
Engine Coolant Check Test	No air bubbles or oil film in radiator	FOS - 30 Manual, Chapter 12

ENGINE TUNE-UP

Operation	Specification	Section-Group Reference
Air Intake System Service air cleaner and check system for leaks	FOS - 30 Manual, Chapter 12
Check system for restrictions using water manometer	FOS - 30 Manual, Chapter 12
Normal reading, inches of water (with clean filter elements)	10-11 in. at 2200 rpm (Full load)	
Maximum permitted reading	25 in. at 2200 rpm (Full load)	
Check restriction indicator light operation	24-26 in. at 2200 rpm	
Check manifold pressure	16-20 psi at full load	30-10

ENGINE TUNE-UP—Continued

Operation	Specification	Section-Group Reference
Exhaust System		
Check system for leaks	FOS - 30 Manual, Chapter 12
Check muffler and exhaust pipe for restrictions	FOS - 30 Manual, Chapter 12
Crankcase Ventilating System		
Check system for restrictions	FOS - 30 Manual, Chapter 12
Cooling System		
Clean grill screen, radiator core, and oil cooler core	20-30
Clean and flush system; check thermostat	Starts to open-177°F. to 182°F.	20-30
Check pressure cap	6.25 to 7.50 psi release pressure	20-30
Cylinder Head and Valves		
Torque cylinder head cap screws	130 ft-lbs in sequence	20-10
Set valve clearance	Intake - 0.018 in. Exhaust - 0.028 in.	20-10
Diesel Fuel System		
Check fuel tank for water	30-15
Check fuel pump pressure	3-1/2 - 4-1/2 psi (Roosa Master) or 20-25 psi (Bosch)	30-15
Change filter	30-15
Injection Pump:		
Service and check timing	TDC	30-15
	5° advance at 1900 rpm (full load) on Roosa Master pump	30-15
Adjust throttle linkage		
	Slow idle - 800 rpm	30-20
	Fast idle - 2400 rpm	30-20
	Foot throttle - 2650 rpm; Ser. No. (-2699)	30-20
Lubrication system		
Check engine oil pressure	40 - 50 psi (1900 rpm)	20-25
Charging System		
Check battery specific gravity	1.240 - 1.260	40-10 & 12
Check battery water consumption and electrolyte level	40-10 & 12
Clean battery, cables, and box	40-10 & 12
Clean alternator belt tension		
Tractors Ser. No. (-2699)	1-inch deflection, 25 lb. force (20 lb. force on air conditioned)	Operator's Manual
Tractors Ser. No. (2700-)	1-inch deflection, 25 lb. force	

ENGINE TUNE-UP—Continued

Operation	Specification	Section-Group Reference
Check alternator output Motorola	45 amps at 13 to 15 volts (1440 engine rpm). On air conditioned tractors, 65 amps at 13 to 15 volts (1400 engine rpm)	40-10
Delcotron, Ser. No. (-2699)	50 amps at 13 to 15 volts (2400 engine rpm). On air conditioned tractors, 65 amps at 13 to 15 volts (1750 engine rpm)	40-12
Delcotron, Ser. No. (2700-)	50 amps at 13 to 15 volts (1880 engine rpm). On air conditioned tractors, 65 amps at 13-15 volts (1880 engine rpm)	40-12
Check alternator regulated voltage	14.2 - 14.6 volts (operating)	40-10
Starting System		
Check start-safety switch operation	40-15
Check battery voltage when starting	Min. 9 volts (cranking)	40-15
Check starter current draw	Approx. 400 amps	40-15
Check operation of alternator and oil pressure indicator lights	40-25

FINAL ENGINE TEST

Operation	Specification	Section-Group Reference
Dynamometer Test (at 2200 engine rpm full load)	Compare with previous recorded output; record for future use	FOS - 30 Manual - ENGINES, Chapter 12